

MODULAR QUICK CHANGE SYSTEMS

BENZ Solidfix® | BENZ CAPTO™

Tooling technology

Metal | Wood | Composites machining



BENZ GMBH

WERKZEUGSYSTEME

At BENZ Werkzeugsysteme, our maxim, „Innovation. Precision. Passion.“ is far more than just a marketing formula. Rather, it describes the core goals of our business while also outlining the reasons why we have been able to compete in the market successfully with tool systems for woodworking, metal machining and composite material processing for more than 30 years.

Innovations are important to us. But we also recognize that they can be successful only if they precisely meet the needs of our customers. This is why we have maintained a strict focus on our customers for many years. We ensure that our developments and innovations simplify your production processes and lower your manufacturing costs – and ultimately improve your competitiveness as a result.

INNOVATION. With an eye on what is currently within the bounds of feasibility, we strive to always make use of innovative technologies. And we keep in close contact with our customers to ensure we already know today what our customers will need tomorrow. Technical progress is ingrained into our very identity, which means you can always find smart, detailed solutions in our product range.

PRECISION. We ensure our products have the highest level of precision and reliability. This is vital in our industry. Our customers also rely on absolute precision during production - and need to be able to put all their trust in us. But production is not the only area where we strive for precision. We also seek minimal tolerances and maximum accuracy in other areas as well - from development to sales to delivery.

PASSION. BENZ precision products are composed of a vast array of different individual parts. They are the result of great care that starts in the design phase and even includes the selection of raw materials. Primarily, however, they are the expression of our employee's experience and passion to do good work. We are tool specialists through and through and we are willing to move mountains to reach the perfect solution and to ensure the satisfaction of our customers.

CONTENT

COMMONS

04 [SYSTEM BENEFITS](#)

06 [BENZ SOLIDFIX®](#)

10 [BENZ CAPTO™](#)

ADAPTER & ACCESSORIES

14 [ADAPTER BENZ SOLIDFIX®](#)

24 [ADAPTER BENZ CAPTO™](#)

28 [ACCESSORIES COLLET CHUCK | WRENCHES | MISCELLANEOUS](#)

INFORMATION

35 [OVERVIEW - PICTOGRAMS AND ABBREVIATIONS](#)

36 [BENZ PRODUCT WORLD](#)

SYSTEM BENEFITS

BENZ SOLIDFIX® | BENZ CAPTO™

An investment worth making

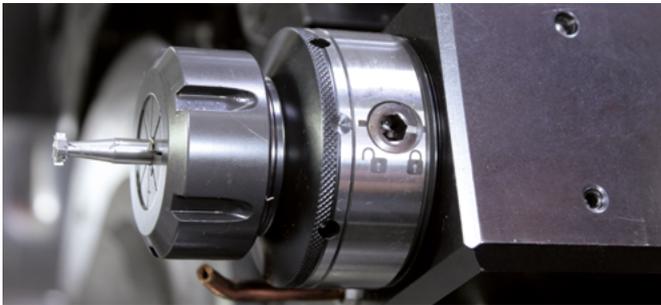
Beside higher rpms and higher accuracy the reduction of set up and machine down times is the main focus in the manufacturing industry. An important success factor is the integration of a modular tool interface.

The basic principle and the biggest advantage of modular tooling systems is that tools can be pre-set, set up and be ready for use on the machine by the operator, all while he is already in the process of machining other parts. The pre-set adapters then can be changed in a flash in the machine.

You as the customer increase the valuable production time of your machine while at the same time saving costs: Due to the modular design only the adapters are being changed - the base tool holder stays in the machine. This reduces the necessity of buying additional tools to a minimum.

With BENZ Solidfix® and BENZ CAPTO™ you have two of the most advanced and sophisticated modular quick change systems available to you.

BENZ Solidfix®



BENZ CAPTO™



PERFORMANCE. PRECISION. HANDLING. SAFETY.



Minimises setup and non-productive time / increases productivity
by changing the preset tool within seconds



Low investment overhead, because the angle head remains on the machine and only an adapter needs to be changed, fewer angle heads are needed overall

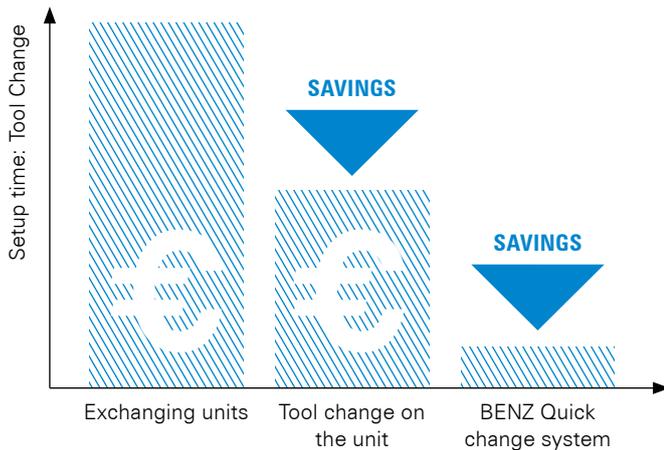


Easy handling
One-hand operation without a special tool



Operating safety
Cannot become detached accidentally

SAVINGS WITH BENZ QUICK CHANGE SYSTEMS



Reduce setup time = Save costs

Long machine standstill times arise for a tool change where the complete unit is taken out of the machine. By changing the cutting tool directly on the unit, setup times can already be reduced by 40%.

The optimum can be achieved with modular quick-change systems. Here the cutting tool is measured outside of the machine in the presetting device. Replacing the adapter therefore only requires a few seconds. You save 90% of your original setup costs! You also reduce your reject rate as the first part is already a good part.

FIELD OF APPLICATION

Can be used on all common machines.

Are you looking for a quick change system that can be used in all areas of your production? The modular Quick Change Systems made by BENZ can be used in Live Tools as well as right angle heads, even Multi-spindle heads.

BENZ Solidfix® and BENZ CAPTO™ are not only suited for large batch manufacturing but are especially cost effective when machines have to be re-tooled frequently due to manufacture of small lots or specialty parts. You save time and money.

Lathes

Machining centers



MODULAR QUICK CHANGE SYSTEM

BENZ SOLIDFIX®

User friendly, stable and very precise

By combining taper concentricity with no backlash with an extremely large planar surface, combined with high torque, BENZ Solidfix® offers a maximum in stability and rigidity, which is even capable of withstanding the demands of milling. The high torque transmission and the highest possible rpms also stress the effectiveness.

This is supported by a special clamping mechanism which works centrally, without lateral forces, which in combination with the compact, highly precise components used achieves optimal values for concentricity, rigidity and accuracy in repeatability. Because of its compact design the system is ideal for tools with internal cooling.



PRODUCT BENEFITS

Performance

- compact design
- large planar contact surface
- high rigidity (milling capable)
- high transmission of torque
- high speed (balancing-neutral design)

Precision

- high concentricity: < 5 µm auf 30 mm
- high repeatability
- central, cross-force-free transmission of forces
- play-free centering of taper

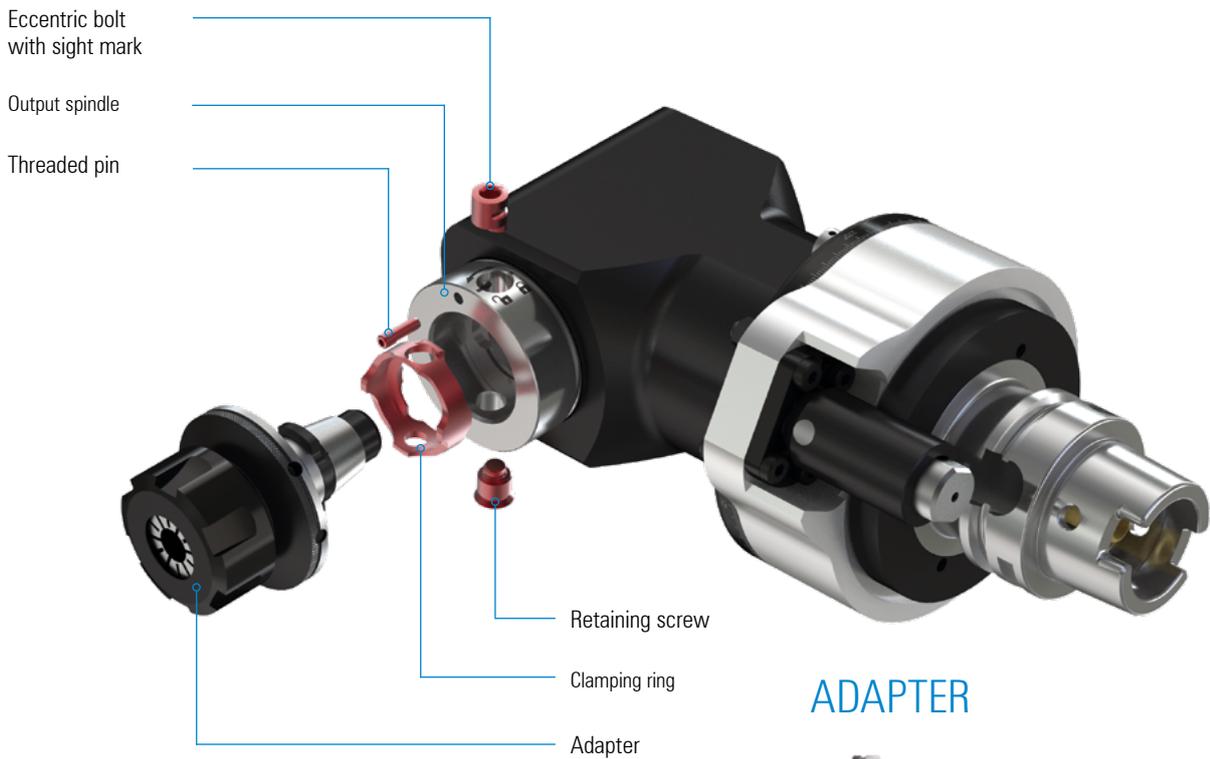
Handling

- quick change, change in < 20 seconds
- one-hand operation
- simple handling without the need of special tools
- resistance controlled clamping (180°) - no need to observe torque
- ejection feature

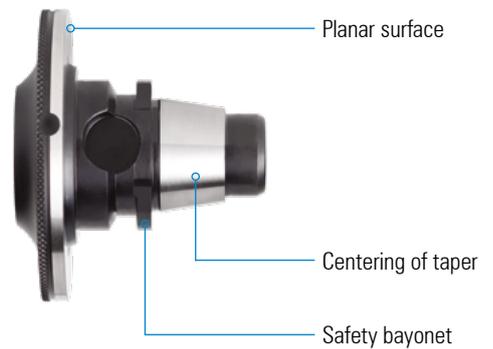
Safety

- securing device via safety bayonet
- self-locking clamp function
- avoidance of operating errors
- fulfills machinery directive 2006/42/EG

BENZ SOLIDFIX® - SYSTEM DESIGN



ADAPTER



SYSTEM OVERVIEW

Size	Technical data	
	T* [Nm]	Size Inbus wrench
S1	25	SW 3
S2	50	SW 4
S3	100	SW 5
S4	200	SW 6
S5	400	SW 6

*transmittable torque of interface



IC-capable

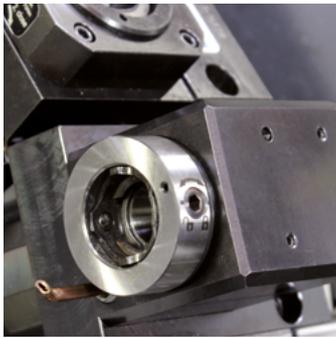


MQL-capable Adapter on request

MODULAR QUICK CHANGE SYSTEM

BENZ SOLIDFIX®

TOOL CHANGE



Step 1: Familiarize yourself with the system

In order to change an adapter in the angle head/live tool the operation unit needs to be in the loosed position.



Loose position:
Marking is sitting on open lock

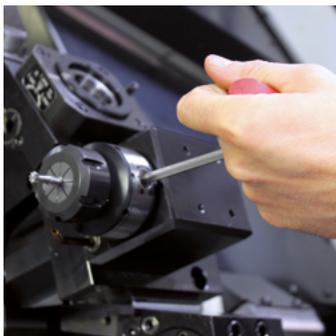


Clamped position:
Marking is sitting on closed lock



Step 2: Inserting the adapter

Insert the adapter into the tool spindle. The adapter cannot fall out due to a special safety mechanism which holds the tool in place, even if not clamped yet. This prevents injuries during set up of the tools in the machine.



Step 3: Resistance controlled clamping

The modular quick change system BENZ Solidfix® can be operated with just one hand without any special tools - a standard hex key is sufficient. By simply turning the clamping screw 180 degrees (up to its end position) the tool adapter (meaning the tool) is clamped.

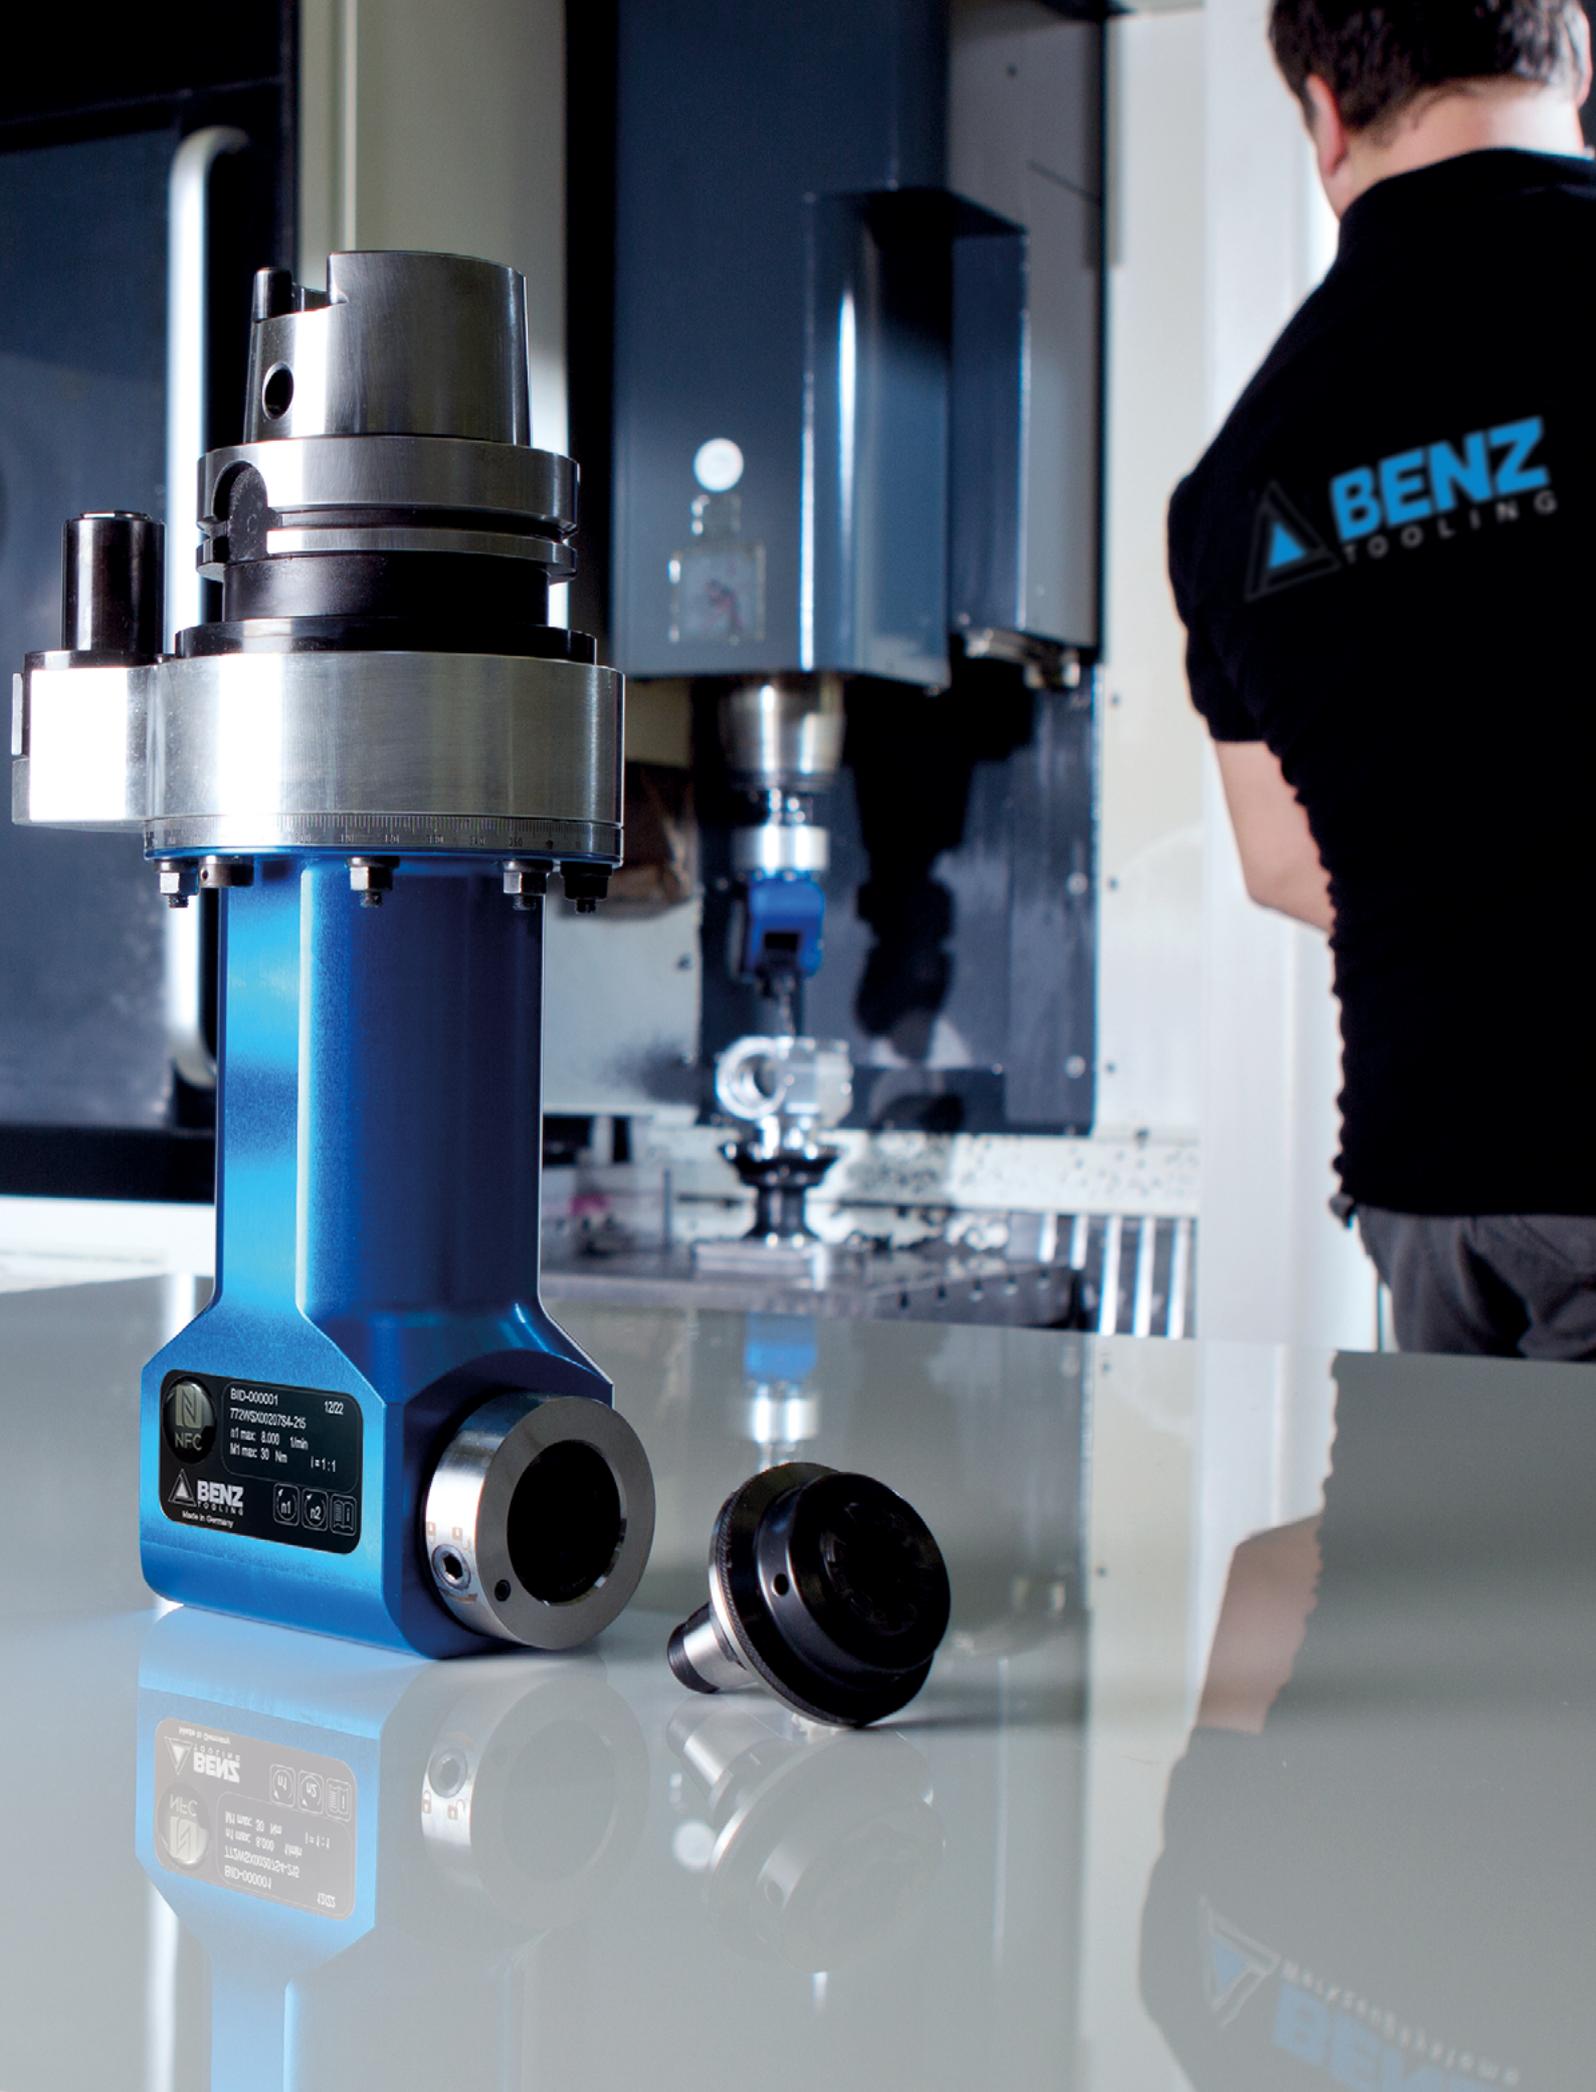


Step 4: Loosening and changing the adapter

After loosening the locking mechanism with a hex key and turning the tool adapter 90 degrees (a bayonet style safety mechanism prevents the tool from falling out after opening the lock) the adapter can be removed.

A specialized eject feature ensures that the adapter does not get stuck in the spindle. The tool change can be done in less than 20 seconds.





BID-000001 1222
772NS10120784-26
M1 max: 8.000 Nm
M1 max: 30 Nm
i=1:1

BENZ
TOOLING
Made in Germany

1) 2) 3)

PROF. DR. GÖTTSCHEW
BENZ
M1-C

M1 max: 30 Nm
M1 max: 8.000 Nm
115M210050121-312
BID-000001

1) 2) 3)

MODULAR QUICK CHANGE SYSTEM

BENZ CAPTO™

Increase of efficiency and machining quality.

The modular quick change system BENZ CAPTO™ guarantees an extremely compact design by being integrated into the spindle. Special clamping kinetics for clamping forces are noticeably below the required range of ISO/DIS 26623-2.

BENZ CAPTO™ can be used for milling, drilling and turning, with up to 100 bar coolant pressure. The system is especially suited for heavy duty milling and machining.



PRODUKT BENEFITS

Performance

- compact design/short implementation
- special clamping kinetics for clamping forces are noticeably below the required range of ISO/DIS 26623-2
- pressure of coolant up to 100 bar
- ideal for heavy milling

Precision

- stability and rigidity with high flexibility at the same time
- compact shape guarantees high cutting speeds and surface quality

Handling

- fast tool change with additional locking mechanism (ratcheted)
- optically visible clamping position 100°
- starting torque: 50 Nm (C4)

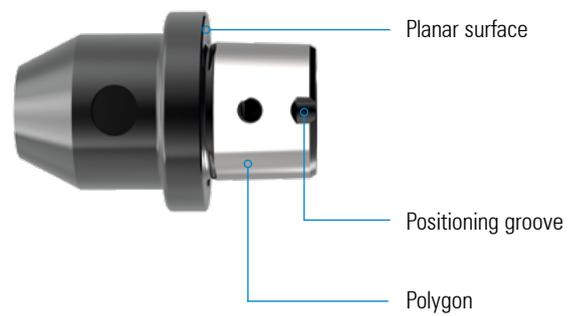
Safety

- from 75 degrees onwards the clamping process is already so secure that the tool can be used in production
- visual markings > correct clamping of the tool is easily seen
- additional safety function > prevents uncontrolled falling out of the tool holder

BENZ CAPTO™ - SYSTEM DESIGN



ADAPTER



SYSTEM OVERVIEW

Size	Technical data	
	T* [Nm]	Size Inbus wrench
C3	250	SW 6
C4	500	SW 8
C5	1000	SW 10
C6	2000	SW 12

*transmittable torque of the polygon



IC-capable

MODULAR QUICK CHANGE SYSTEM

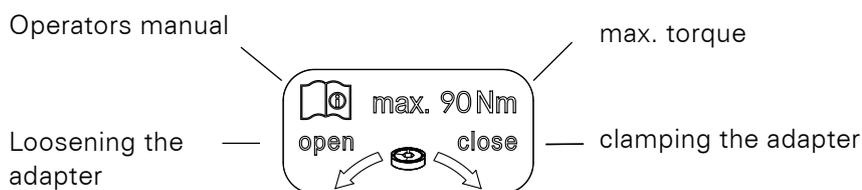
BENZ CAPTO™

TOOL CHANGE



Step 1: Familiarize yourself with the symbols

In order to change an adapter in the angle head/live tool the operation unit needs to be in the loosed position.



Step 2: Cleaning of tool holder with compressed air

Clean the tool insert. Please note: Only clean around the edges of the Polygon. Never blow air centrally into the clamping mechanism!



Step 3: Inserting the adapter

Inserting the adapter into the tool holder (in release position). The adapter is held in the base by a locking mechanism.



The locking mechanism holds the tool in the base



Step 4: Getting markings in a line

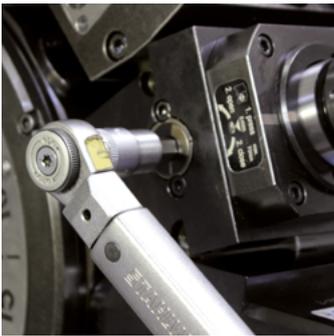
Align the marks on the housing to the spindle. The adapter is held in the base by a locking mechanism.

Note: this step is only necessary for Live Tools. Static BENZ CAPTO™ tools have a fixed polygon position.



Step 5: Clamping of the adapter

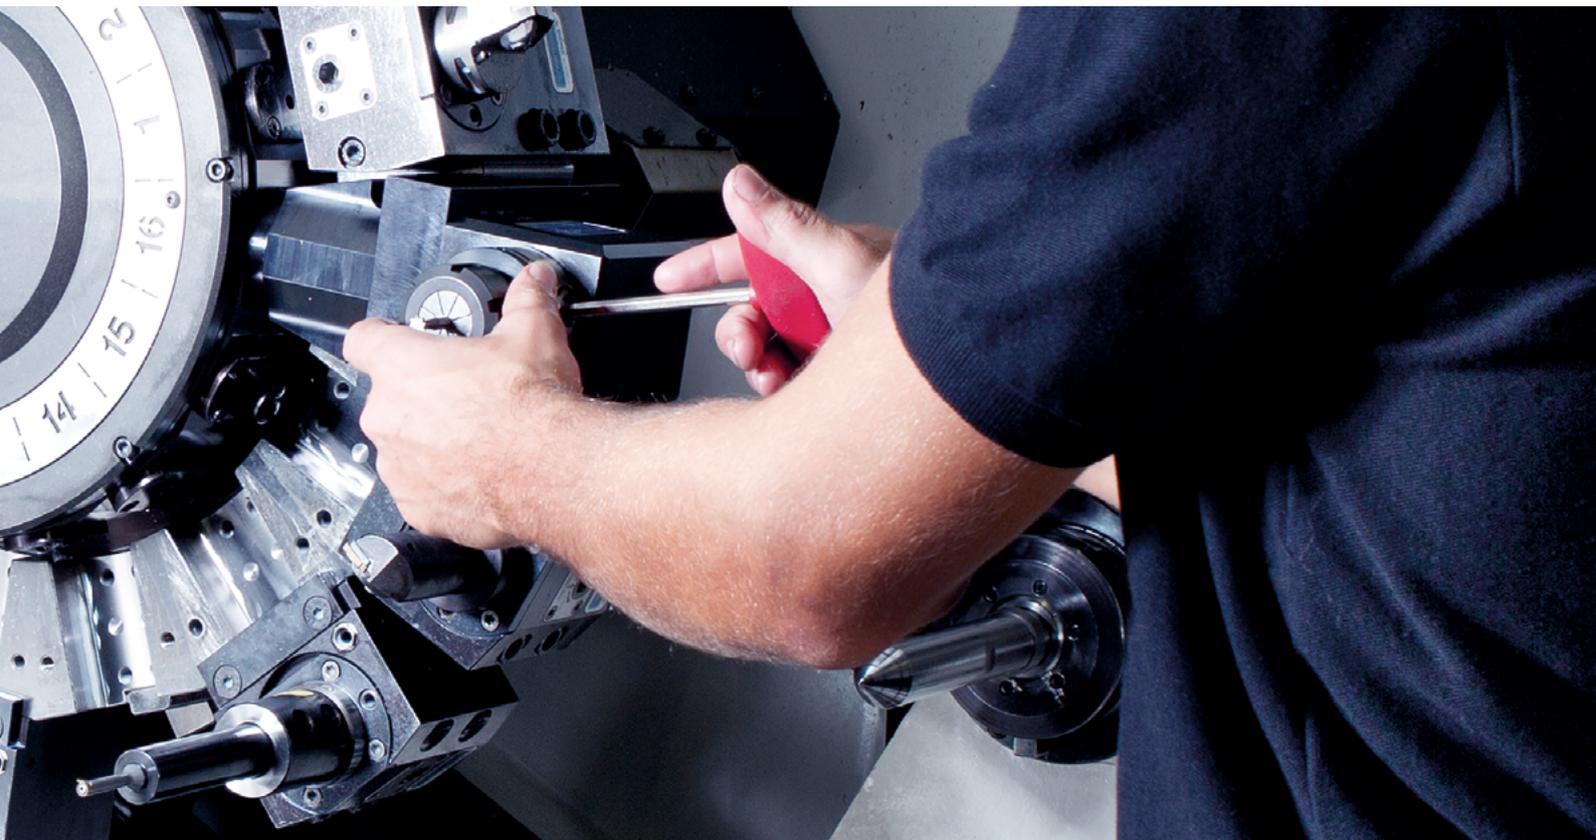
To do this press the mechanism and at the same time rotate by approx. 100 degree clockwise in the "close" direction. Optimal clamping force is achieved when applying the recommended torque. The tool is already clamped securely as soon as a 75 degree angle is achieved.

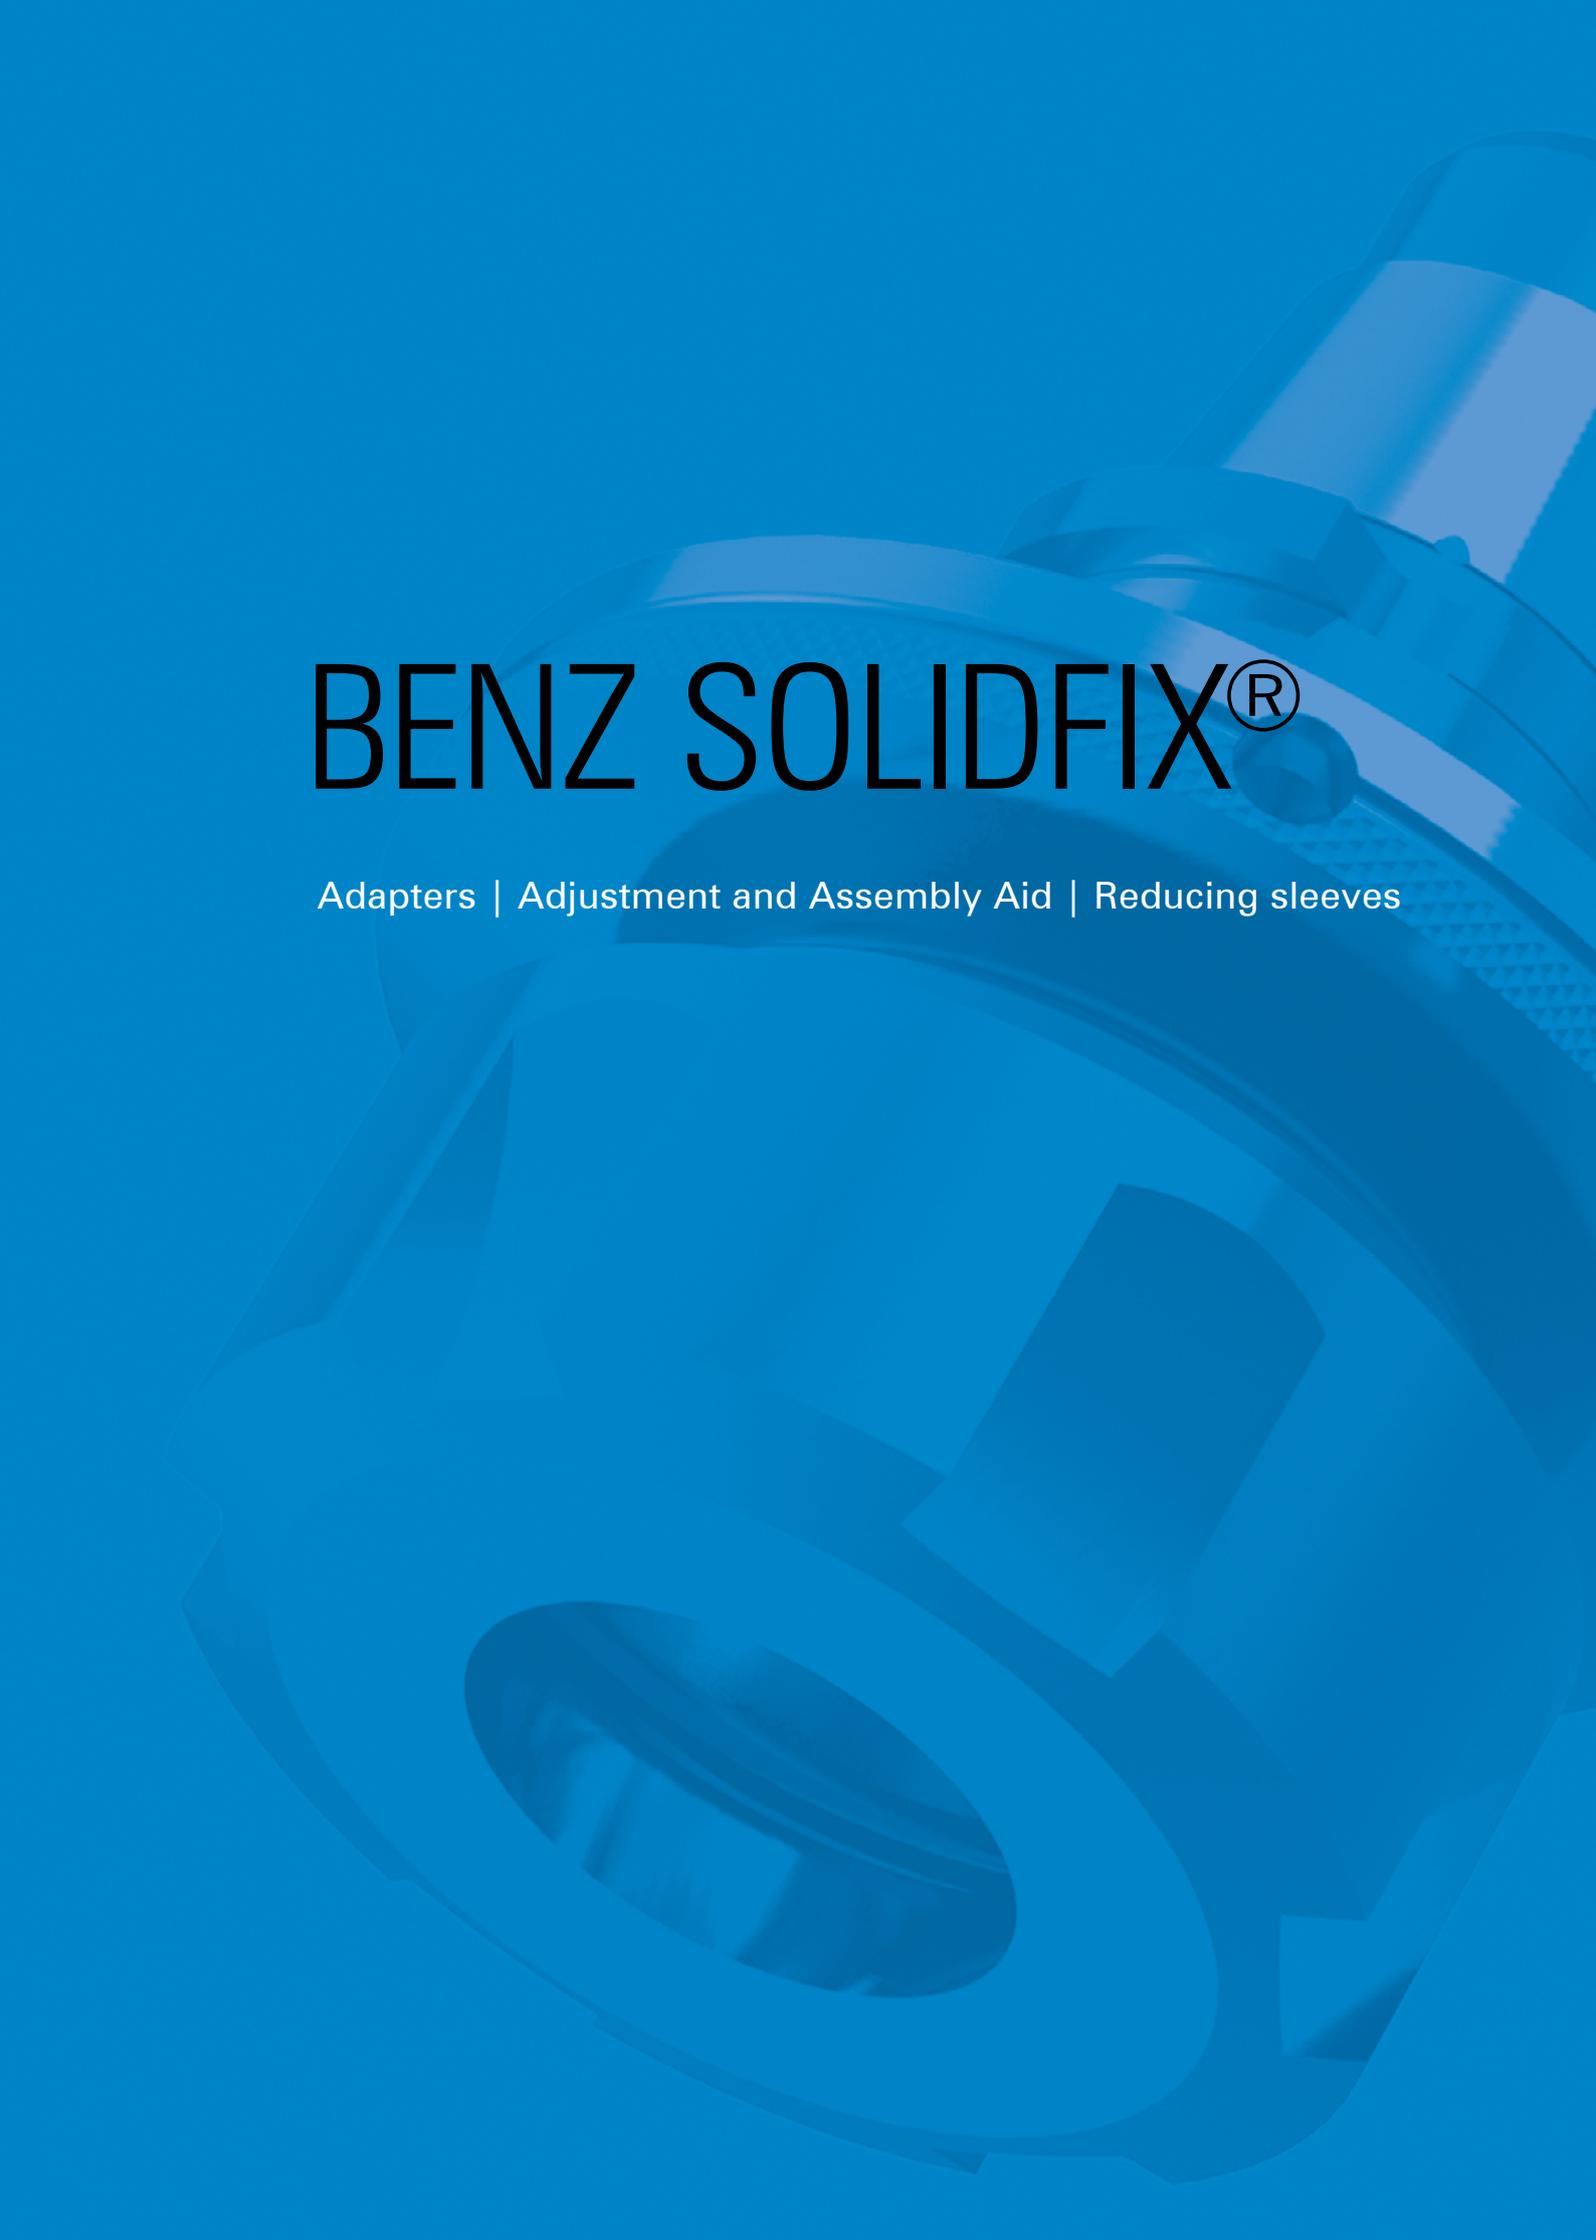


Step 6: Loosening the adapter

After the machining process, release the adapter again by first aligning the mark on the housing with the mark on the spindle. Then press the actuating unit. The adapter will be held in the tool after loosening until you take it out.

Note for clamping and un-clamping: for static BENZ CAPTO™ tools it is sufficient to simply rotate, no pressure needs to be applied.





BENZ SOLIDFIX[®]

Adapters | Adjustment and Assembly Aid | Reducing sleeves

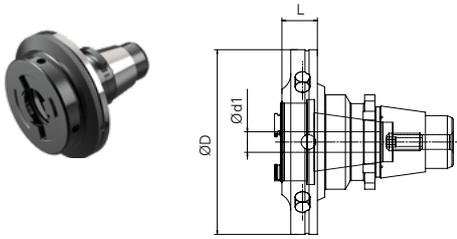
BENZ SOLIDFIX®

	COLLET CHUCK 8° Typee ER	16		TAPPING CHUCK Emuge	17
	WELDON for parallel shanks DIN 1835B	17		WHISTLE-NOTCH for parallel shanks DIN 1835E	18
	MILLING ARBOR	18		SAW BLADE HOLER screwed on arbor	19
	SHRINK FIT CHUCK	19		SCREW-IN MILL CUTTER Basic holder	20
	HYDRO CLAMPING CHUCK	20		SQUARE SHOULDER / PLUNGE MILL CUTTER	21
	TEST MANDREL	21		MASTER SHANKS VDI DIN 69880 / HSK Form A ISO 12164 SK DIN 69871 AD	22
	MOUNTING BLOCK	22		REDUCING SLEEVE	23
	BLANK	23		CLOSING PLUG	23

 Further customer-specific adapters on request. Please contact our BENZ sales team.

ADAPTER BENZ SOLIDFIX®

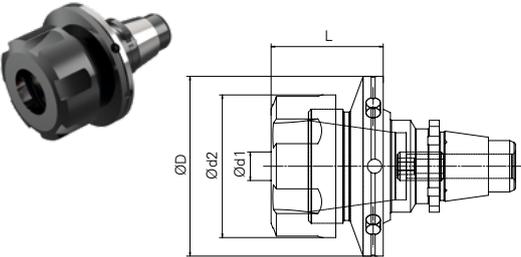
COLLET CHUCK 8° TYPE ER | INTERNAL CLAMPING NUT

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	Type	ØD [mm]	Ød1 [mm]	L [mm]			
	S1	ER11	32	1-7	9	●	●	691.130E1A09	
	S2	ER16	40	1-10	13	●	●	692.130E3A13	
	S3	ER16	50	1-10	10	●	●	693.130E3A10	
	S3	ER20	50	2-13	14	●	●	693.130E4A14	
	S4	ER16	63	1-10	11	●	○	694.130E3A11	
	S4	ER20	63	2-13	12	●	●	694.130E4A12	
	S4	ER25	63	2-16	20	●	●	694.130E5A20	
	S5	ER32	75	2-20	22	●	●	695.130E6A22	

Collet chuck not included

 Accessories page 28

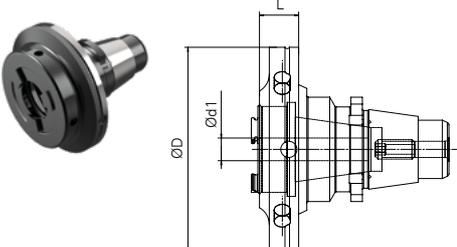
COLLET CHUCK 8° TYPE ER | EXTERNAL CLAMPING NUT

Model	Drawing	Technical data						Product center	Availability	Order number
		Size	Type	ØD [mm]	Ød1 [mm]	Ød2 [mm]	L [mm]			
	S1	ER11M	32	1-7	16	20	●	●	691.130M120	
	S1	ER16M	32	1-10	22	30	●	●	691.130M230	
	S2	ER20M	40	2-13	28	31	●	●	692.130M331	
	S2	ER20	40	2-13	34	31	●	●	692.130E431	
	S3	ER16M	50	1-10	22	32	●	●	693.130M232	
	S3	ER20	50	2-13	34	30	●	●	693.130E430	
	S3	ER25	50	2-16	42	34	●	●	693.130E534	
	S3	ER32	50	2-20	50	48	●	●	693.130E648	
	S4	ER16M	63	1-10	22	30	●	○	694.130M232	
	S4	ER25	63	2-16	42	35	●	○	694.130E535	
	S4	ER32	63	2-20	50	39	●	●	694.130E639	
	S5	ER32	75	2-20	50	40	●	●	695.130E640	
	S5	ER40	75	3-26	63	46	●	●	695.130E746	

Collet chuck not included

 Accessories page 28

ULTRA-PRECISION COLLET CHUCK 8° TYPE ER | INTERNAL CLAMPING NUT

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	Type	ØD [mm]	Ød1 [mm]	L [mm]			
	S1	ER 16M	32	1-10	30	●	○	691.130M230UP	
	S2	ER 16	40	1-10	13	●	○	692.130E3A13UP	
	S3	ER 20	50	2-13	14	●	○	693.130E4A14UP	
	S4	ER 25	63	2-16	20	●	○	694.130E5A20UP	
	S5	ER 32	75	2-20	22	●	○	695.130E6A22UP	

UP-collet chucks: differ versus standard collet chucks by being extremely precise for high speed machining

 Accessories page 28

● PC Metal

● PC Wood

● on stock

○ on request

TAPPING CHUCK | EMUGE

Model	Drawing	Technical data						Product center	Availability	Order number
		Size	Type	ØD [mm]	Ød2 [mm]	M [mm]	L* [mm]			
		S3	ER16	50	39	4-12	48,8	●	○	693.177E348
		S4	ER16	63	39	4-12	53,7	●	○	694.177E348
		S4	ER32	63	45	4-20	81	●	○	694.177E686

* ±0,05

Accessories page 28

WELDON FOR PARALLEL SHANKS DIN 1835 B | SHORT DESIGN

Model	Drawing	Technical data				Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]			
		S1	32	3	4	●	○	691.1400304
		S1	32	4	5	●	○	691.1400405
		S2	40	4	5	●	○	692.1400405
		S2	40	6	7	●	○	692.1400607
		S3	50	6	6	●	●	693.1400606
		S3	50	8	8	●	●	694.1400808
		S4	63	6	7	●	●	694.1400607
		S4	63	8	8	●	●	694.1400808
		S4	63	10	10	●	●	694.1401010
		S4	63	12	12	●	●	694.1401212
		S5	75	6	10	●	○	695.1400610
		S5	75	8	10	●	●	695.1400810
		S5	75	10	10	●	●	695.1401010
		S5	75	12	10	●	●	695.1401210
		S5	75	14	12	●	○	695.1401412
		S5	75	16	12	●	●	695.1401612

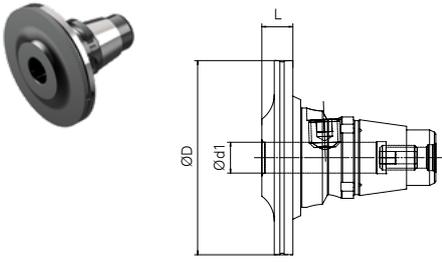
Minimum construction length

WELDON FOR PARALLEL SHANKS DIN 1835 B | STANDARD DESIGN

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]	L [mm]			
		S1	32	6	25	24	●	○	691.1400624
		S2	40	8	28	25	●	○	692.1400825
		S3	50	10	35	28	● ●	●	693.1401028
		S3	50	12	42	32	● ●	●	693.1401232
		S3	50	16	48	35	● ●	●	693.1401635
		S4	63	14	48	32	●	●	694.1401432
		S4	63	16	48	35	●	●	694.1401635
		S4	63	18	50	35	●	○	694.1401835
		S4	63	20	52	38	●	●	694.1402038
		S4	63	25	63	52	●	○	694.1402552
		S5	75	18	50	36	●	○	695.1401836
		S5	75	20	52	38	●	○	695.1402038
		S5	75	25	65	40	●	●	695.1402540

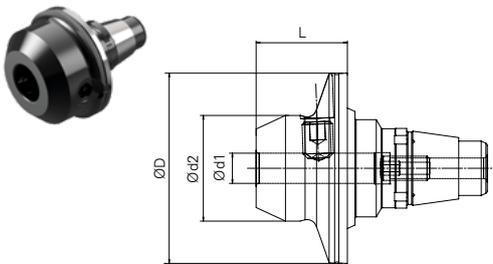
ADAPTER BENZ SOLIDFIX®

WHISTLE NOTCH PARALLEL SHANKS DIN 1835 E | SHORT DESIGN

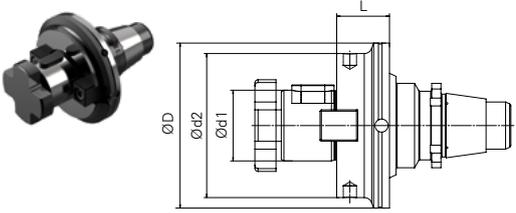
Model	Drawing	Technical data				Product center	Avail-ability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]			
		S2	40	6	9	●	○	692.1410609
		S3	50	6	6	●	○	693.1410606
		S3	50	8	8	●	○	693.1410808
		S4	63	6	7	●	○	694.1410607
		S4	63	8	8	●	○	694.1410808
		S4	63	10	10	●	○	694.1411010
		S4	63	12	12	●	○	694.1411212
		S5	75	6	10	●	○	695.1410610
		S5	75	8	10	●	○	695.1410810
		S5	75	10	10	●	○	695.1411010
		S5	75	12	10	●	○	695.1411210
		S5	75	14	12	●	○	695.1411412
		S5	75	16	12	●	○	695.1411612

Minimum construction length

WHISTLE NOTCH PARALLEL SHANKS DIN 1835 E | STANDARD DESIGN

Model	Drawing	Technical data				Product center	Avail-ability	Order number	
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]				L [mm]
		S1	32	6	25	24	●	○	691.1410624
		S2	40	8	28	25	●	○	692.1410825
		S3	50	10	35	28	●	○	693.1411028
		S3	50	12	42	32	●	○	693.1411232
		S3	50	16	48	35	●	○	693.1411635
		S4	63	14	48	32	●	○	694.1411432
		S4	63	16	48	35	●	○	694.1411635
		S4	63	18	50	35	●	○	694.1411835
		S4	63	20	52	38	●	○	694.1412038
		S5	75	18	50	36	●	○	695.1411836
		S5	75	20	52	38	●	○	695.1412038
		S5	75	25	65	40	●	○	695.1412540

MILLING ARBOR

Model	Drawing	Technical data				Product center	Avail-ability	Order number	
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]				L [mm]
		S2	40	16	34	11	●	●	692.2311611
		S3	50	16	34	12	●	○	693.2311612
		S3	50	22	48	14	●	●	693.2312214
		S4	63	16	34	14	●	○	694.2311614
		S4	63	22	48	14	●	●	694.2312214
		S4	63	27	55	14	●	●	694.2312714
		S5	75	22	48	12	●	○	695.2312212
		S5	75	27	55	14	●	○	695.2312714
		S5	75	32	62	15	●	○	695.2313215

● PC Metal ● PC Wood ● on stock ○ on request

SAW BLADE HOLDER | SCREWED

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØTK/M	ØD [mm]	Ød1 [mm]	L [mm]			
		S3	45 / 5	60	30	8	●	●	693.04030S0561
		S3	52 / 5	60	40	8	●	●	693.04040S0414

Accessories page 28

SAW BLADE HOLDER | ON ARBOR

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	WZ-Länge [mm]	ØD [mm]	Ød1 [mm]	L [mm]			
		S3	● 1-6	60	30	38	●	●	693.040SD38

Accessories page 28

SHRINK FIT CHUCK | ONE-PIECE


Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]	L [mm]			
		S3	50	6	21	45	●	●	693.1520645KB
		S3	50	8	21	45	●	●	693.1520845KB
		S3	50	10	24	50	●	○	693.1521050KB
		S3	50	12	24	55	●	●	693.1521255KB
		S4	63	6	21	50	●	●	694.1520650KB
		S4	63	8	21	50	●	●	694.1520850KB
		S4	63	10	24	50	●	○	694.1521050KB
		S4	63	12	24	55	●	○	694.1521255KB
		S4	63	14	29	55	●	○	694.1521455KB
		S4	63	16	29	55	●	○	694.1521655KB
		S4	63	20	33	60	●	○	694.1522060KB
		S5	75	6	21	55	●	○	695.1520655KB
		S5	75	8	21	55	●	○	695.1520855KB
		S5	75	10	24	55	●	○	695.1521055KB
		S5	75	12	24	60	●	○	695.1521260KB
		S5	75	20	33	65	●	○	695.1522065KB
		S5	75	25	44	70	●	○	695.1522570KB

Coolant central or via holes on the collar (without coolant hole on request)

MQL-capable adapter on request


ADAPTER BENZ SOLIDFIX®

SCREW-IN MILL CUTTER - BASE HOLDER | SHORT DESIGN

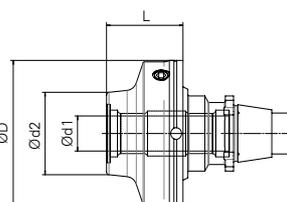
Model	Drawing	Technical data				Product center	Avail-ability	Order number
		Size	ØD [mm]	M [mm]	L [mm]			
		S3	50	M10	8	●	○	693.2861008
		S3	50	M12	8	●	○	693.2861208
		S4	63	M12	9	●	○	694.2861209
		S4	63	M16	9	●	○	694.2861609
		S5	75	M12	10	●	○	695.2861210
		S5	75	M16	10	●	○	695.2861610

Base holder fits all standard threaded arbors (e.g. Seco, Kennametal...)

SCREW-IN MILL CUTTER - BASE HOLDER | SHORT DESIGN - HAIMER

Model	Drawing	Technical data					Product center	Avail-ability	BENZ	HAIMER
		BENZ Solidfix	Haimer Duolock	ØD [mm]	M [mm]	L [mm]			Order number	Order number
		S3	DL10	50	M10	8	●	○	693.2871008	75.SFS3.DL10.080
		S3	DL12	50	M12	8	●	○	693.2871208	75.SFS3.DL12.080
		S3	DL16	50	M16	8	●	○	693.2871608	75.SFS3.DL16.080
		S4	DL12	63	M12	9	●	○	694.2871209	75.SFS4.DL12.080
		S4	DL16	63	M16	9	●	○	694.2871609	75.SFS4.DL16.080
		S4	DL20	63	M20	9	●	○	694.2872009	75.SFS4.DL20.080
		S5	DL16	75	M16	10	●	○	695.2871610	75.SFS5.DL16.080
		S5	DL20	75	M20	10	●	○	695.2872010	75.SFS5.DL20.080
		S5	DL25	75	M25	10	●	○	695.2872510	75.SFS5.DL25.080

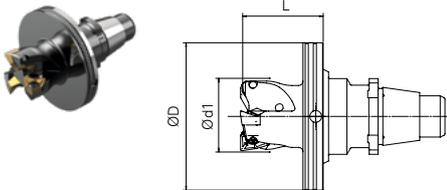
HYDRO CLAMPING CHUCK | ONE-PIECE

Model	Drawing	Technical data				Product center	Avail-ability	Order number	
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]				L [mm]
		S3	50	6	28	18	●	○	693.1580618
		S3	50	10	28	23	●	○	693.1581023
		S3	50	12	28	28	●	●	693.1581228
		S4	63	06	28	20	●	○	694.1580620
		S4	63	12	28	28	●	●	694.1581228
		S4	63	20	28	42	●	○	694.1582042
		S5	75	16	38	30	●	○	695.1581630
		S5	75	20	38	30	●	●	695.1582030

Version two-part with Hydrostar-insert on request

● PC Metal ● PC Wood ● on stock ○ on request

SQUARE SHOULDER | PLUNGE MILL

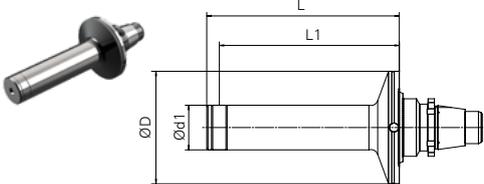
Model	Drawing	Technical data				Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]			
		S3	50	25	28	●	○	693.6502528S001
		S4	63	32	33	●	○	694.6503233S001

Cooperation with



Indexable inserts not included in scope of supply / Can be supplied by Paul Horn GmbH (Type DA32)

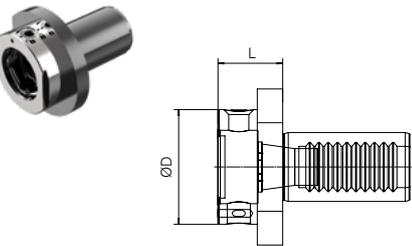
TEST MANDREL

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]	*L1 [mm]			
		S1	32	12	55	50	●	●	691.2471255
		S2	40	16	68	63	●	●	692.2471668
		S3	50	20	87	80	●	●	693.2472087
		S4	63	25	107	100	●	●	694.24725107
		S5	75	32	134	125	●	●	695.24732134

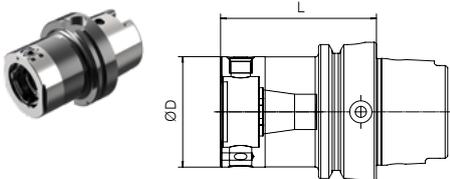
Scope of supply: Test mandrel in case with test certificate

*Measuring point

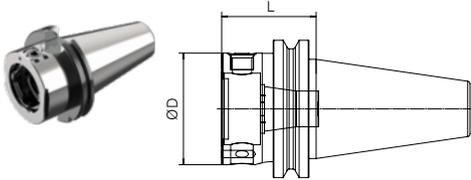
MASTER SHANK / BASE HOLDER | VDI

Model	Drawing	Technical data				IC	Product center	Availability	Order number
		Size	Type	ØD [mm]	L [mm]				
		S1	VDI 20	32	22		●	○	112.251S1022VE
		S2	VDI 25	40	25		●	○	325.251S2025VE
		S3	VDI 30	50	25		●	○	113.251S2025VE
		S3	VDI 30	50	32	✓	●	●	113.251S3032R
		S4	VDI 40	63	28		●	○	114.251S3028VE
		S4	VDI 40	63	30		●	○	114.251S4030VE
		S4	VDI 40	63	32	✓	●	●	114.251S4032R
		S5	VDI 50	75	32		●	○	115.251S5032VE
		S5	VDI 50	75	35	✓	●	●	115.251S5035R

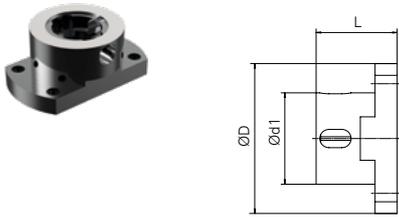
MASTER SHANK | HSK

Model	Drawing	Technical data				Product center	Availability	Order number
		Size	Type	ØD [mm]	L [mm]			
	S1	HSK 63-A	32	55	●	○	711.251S1055VE	
	S2	HSK 63-A	40	62	●	○	711.251S2062VE	
	S3	HSK 63-A	50	70	●	●	711.251S3070VE	
	S4	HSK 63-A	63	75	●	●	711.251S4075VE	
	S5	HSK 63-A	75	80	●	○	711.251S5080VE	
	S3	HSK 63-F	50	70	●	●	727.251S3070VE	
	S4	HSK 100-A	63	80	●	○	713.251S4080VE	
	S5	HSK 100-A	75	90	●	○	713.251S5090VE	

MASTER SHANK | SK

Model	Drawing	Technical data				Product center	Availability	Order number
		Size	Type	ØD [mm]	L [mm]			
	S1	SK 30	32	30	●	○	090.251S1030VE	
	S2	SK 30	40	40	●	○	090.251S2040VE	
	S3	SK 40	50	42	●	●	040.251S3042VE	
	S4	SK 40	63	55	●	●	040.251S4055VE	
	S5	SK 50	75	52	●	○	042.251S5052VE	

MOUNTING BLOCK

Model	Drawing	Technical data				Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]			
	S1	62	31	30	●	●	B300-4-S1	
	S2	67	40	38	●	●	B300-4-S2	
	S3	82	50	44	●	●	B300-4-S3	
	S4	96	65	50	●	●	B300-4-S4	
	S5	116	75	60	●	●	B300-4-S5	

No integrated clamping mechanism

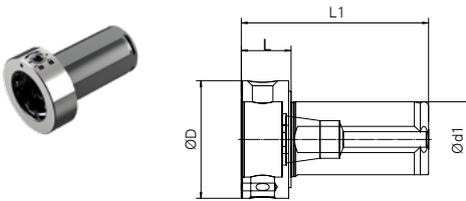
● PC Metal

● PC Wood

● on stock

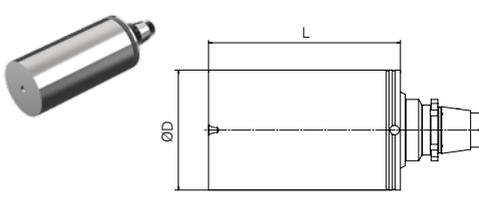
○ on request

REDUCING SLEEVE

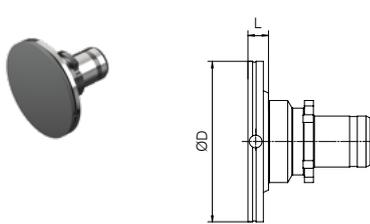
Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	L [mm]	L1 [mm]			
		S2	40	25	17	65	●	○	B570-25S2
		S3	50	32	21	79	●	●	B570-32S3
		S4	63	40	22	94	●	●	B570-40S4

Used for boring bars or combination holders

BLANK

Model	Drawing	Technical data			Product center	Availability	Order number
		Size	ØD [mm]	L [mm]			
		S1	32	63	●	○	691.1023263
		S2	40	80	●	●	692.1024080
		S3	50	100	●	●	693.10250100
		S4	63	125	●	●	694.10263125
		S5	75	160	●	●	695.10275160

CLOSING PLUG

Model	Drawing	Technical data			Product center	Availability	Order number
		Size	ØD [mm]	L [mm]			
		S1	32	3,5	●	○	691.581S
		S2	40	4	●	○	692.581S
		S3	50	5	●	●	693.581S
		S4	63	6	●	●	694.581S
		S5	75	8	●	●	695.581S

made of Steel



BENZ CAPTO™

Adapters

BENZ CAPTO™



COLLET CHUCK
8° Type ER 26



WELDON
for parallel shanks DIN 1835B 26



MILLING ARBOR 27



BLANK 27



CLOSING PLUG 27

ADAPTER

BENZ CAPTO™

COLLET CHUCK 8° TYPE ER | EXTERNAL CLAMPING NUT

Model	Drawing	Technical data						Product center	Availability	Order number
		Size	Type	ØD [mm]	Ød1 [mm]	Ød2 [mm]	L [mm]			
		C3	ER11	32	1-7	19	22	●	●	550.130E122
		C3	ER16	32	1-10	28	30	●	●	550.130E330
		C3	ER20	32	2-13	34	35	●	●	550.130E435
		C3	ER25	32	2-16	42	44	●	●	550.130E544
		C4	ER16	40	1-10	28	27	●	○	551.130E327
		C4	ER20	40	2-13	34	32	●	○	551.130E432
		C4	ER25	40	2-16	42	35	●	●	551.130E535
		C4	ER32	40	2-20	50	52	●	●	551.130E652
		C5	ER16	50	1-10	28	29	●	○	552.130E329
		C5	ER25	50	2-16	42	34	●	○	552.130E534
		C5	ER32	50	2-20	50	41	●	●	552.130E641
		C5	ER40	50	3-26	63	58	●	○	552.130E758
		C6	ER32	63	3-26	63	40	●	○	553.130E640
		C6	ER40	63	3-26	63	46	●	○	553.130E746

without gripper groove

Accessories page 28

WELDON FOR PARALLEL SHANKS DIN 1835 B | STANDARD DESIGN

Model	Drawing	Technical data				Product center	Availability	Order number	
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]				L [mm]
		C3	32	6	25	33	●	●	550.1400633
		C3	32	8	28	33	●	●	550.1400833
		C3	32	10	35	37	●	●	550.1401037
		C3	32	12	42	42	●	●	550.1401242
		C3	32	14	44	43	●	○	550.1401443
		C3	32	16	48	51	●	●	550.1401651
		C4	40	6	25	30	●	●	551.1400630
		C4	40	8	28	30	●	●	551.1400830
		C4	40	10	35	34	●	●	551.1401034
		C4	40	12	42	39	●	●	551.1401239
		C4	40	14	44	39	●	○	551.1401439
		C4	40	16	48	43	●	●	551.1401643
		C4	40	18	50	43	●	○	551.1401843
		C4	40	20	52	45	●	●	551.1402045
		C5	50	6	25	29	●	○	552.1400629
		C5	50	8	28	29	●	○	552.1400829
		C5	50	10	35	33	●	○	552.1401033
		C5	50	12	42	38	●	○	552.1401238
		C5	50	14	44	38	●	○	552.1401438
		C5	50	16	48	41	●	○	552.1401641
		C5	50	18	50	42	●	○	552.1401842
		C5	50	20	52	44	●	○	552.1402044
		C5	50	25	65	52	●	○	552.1402552
		C6	63	6	25	28	●	○	553.1400628
		C6	63	8	28	28	●	○	553.1400828
		C6	63	1	35	32	●	○	553.1401032
		C6	63	12	42	37	●	○	553.1401237
		C6	63	14	44	37	●	○	553.1401437
		C6	63	16	48	40	●	○	553.1401640
		C6	63	18	50	41	●	○	553.1401841
	C6	63	20	52	43	●	○	553.1402043	
	C6	63	25	65	52	●	○	553.1402552	

without gripper groove

● PC Metal

● PC Wood

● on stock

○ on request

MILLING ARBOR

Model	Drawing	Technical data					Product center	Availability	Order number
		Size	ØD [mm]	Ød1 [mm]	Ød2 [mm]	L [mm]			
		C3	32	16	34	13	●	●	550.2311613
		C3	32	22	48	17	●	●	550.2312217
		C4	40	22	48	16	●	○	551.2312216
		C4	40	27	51	19	●	○	551.2312719
		C5	50	27	55	11	●	○	552.2312711
		C5	50	32	62	22	●	○	552.2313222
		C6	63	27	63	11	●	○	553.2312711
		C6	63	32	63	16	●	○	553.2313216

without gripper groove

Accessories page 28

BLANK

Model	Drawing	Technical data			Product center	Availability	Order number
		Size	ØD [mm]	L [mm]			
		C3	47	50	●	○	550.1024750
		C4	57	63	●	●	551.1025763
		C5	72	67	●	○	552.1027267
		C6	92	67	●	○	553.1029267

ohne Greiferrille

CLOSING PLUG

Model	Drawing	Technical data			Product center	Availability	Order number
		Size	ØD [mm]	L [mm]			
		C3	32	5	●	●	550.581S
		C4	40	5	●	●	551.581S
		C5	50	6	●	○	552.581S
		C6	63	7	●	○	553.581S

made of steel

ACCESSORIES

Collet Chuck | Wrenches | Miscellaneous



COLLET CHUCK



CLAMPING NUT 36



SEAL RING 37



COLLET CHUCK 37

WRENCHES



COLLET WRENCH 32



INBUS T-WRENCH 33

ACCESSORIES



TAPERCLEANER 33
BENZ Solidfix® / Collet Chuck



KEY BLOCK DIN2097 33

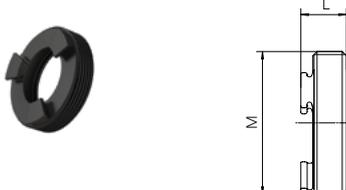


REDUCING SLEEVE 34
COOLANT NOZZLE

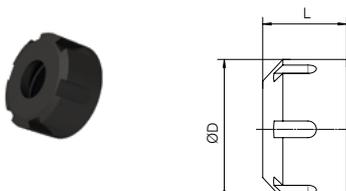
ACCESSORIES

CLAMPING NUT

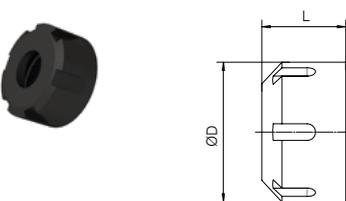
CLAMPING NUT | INTERNAL

Model	Drawing	Technical data			Product center	Availability	Order number
		Size Collet chuck	M	L [mm]			
	ER 11	M18x1	7,5	● ● ●	●	B135-E1AX	
	ER 16	M24x1	7,6	● ● ●	●	B135-E3AX	
	ER 20	M28x1,5	8,5	● ● ●	●	B135-E4AX	
	ER 25	M32x1,5	8,8	● ● ●	●	B135-E5AX	
	ER 32	M40x1,5	9,8	● ● ●	●	B135-E6AX	
	ER 40	M50x1,5	11,7	● ● ●	●	B135-E7AX	

CLAMPING NUT | EXTERNAL – MINI VERSION

Model	Drawing	Technical data			Product center	Availability	Order number
		Size Collet chuck	ØD [mm]	L [mm]			
	ER 8M		12	10,8	● ● ●	○	B135-M0
	ER 11M		16	12	● ● ●	●	B135-M1
	ER 16M		22	18,4	● ● ●	●	B135-M2
	ER 20M		28	19	● ● ●	●	B135-M3
	ER 25M		35	20	● ● ●	●	B135-M3

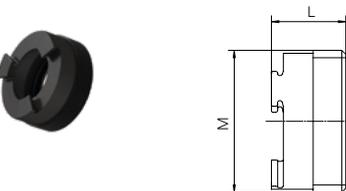
CLAMPING NUT | EXTERNAL

Model	Drawing	Technical data			Product center	Availability	Order number
		Size Collet chuck	ØD [mm]	L [mm]			
	ER 11		19	11,3	● ● ●	○	B135-E1*
	ER 16		28	17,5	● ● ●	●	B135-E3*
	ER 20		34	19	● ● ●	●	B135-E4*
	ER 25		42	20	● ● ●	●	B135-E5
	ER 32		50	22,5	● ● ●	●	B135-E6
	ER 40		63	25,5	● ● ●	●	B135-E7
	ER 50		78	35,5	● ● ●	○	B135-E8

*illustrations deviate

CLAMPING NUT | INTERNAL – SYSTEM REGOFIX

FOR TOOLS WITH INTERNAL COOLANT

Model	Drawing	Technical data			Product center	Availability	Order number
		Size Collet chuck	M	L [mm]			
	ER 16	M24x1	12,5	● ● ●	●	B135-E3AXC	
	ER 20	M28x1,5	13,5	● ● ●	●	B135-E4AXC	
	ER 25	M32x1,5	13,8	● ● ●	●	B135-E5AXC	
	ER 32	M40x1,5	14,9	● ● ●	●	B135-E6AXC	
	ER 40	M50x1,5	16,6	● ● ●	●	B135-E7AXC	


● PC Metal

● PC Wood


● on stock

○ on request

CLAMPING NUT | EXTERNAL - SYSTEM REGOFIX FOR TOOLS WITH INTERNAL COOLANT

Model	Drawing	Technical data			Product center	Avail-ability	Order number
		Size Collet chuck	ØD [mm]	L [mm]			
		ER 16	28	22,5	● ● ●	●	B135-H3A
		ER 20	34	24	● ● ●	●	B135-H4A
		ER 25	42	25	● ● ●	●	B135-H5A
		ER 32	50	27,5	● ● ●	●	B135-H6A
		ER 40	63	30,5	● ● ●	●	B135-H7A

SEAL RING


Model	Drawing	Technical data				Product center	Avail-ability	Order number
		Size Spzge	Ød [mm]	Steigung [mm]				
		ER 16	1-10	0,5	● ● ●	○	B137-E3-...	
		ER 20	1-13	0,5	● ● ●	○	B137-E4-...	
		ER 25	2-16	0,5	● ● ●	○	B137-E5-...	
		ER 32	2-20	0,5	● ● ●	○	B137-E6-...	
		ER 40	4-26	0,5	● ● ●	○	B137-E7-...	

Order No.		
ER 16	B137-E3-	<input type="checkbox"/>
d=6	0600	

Sealing range can be used up to 0.5 mm smaller than nominal dimension d

Example: B137-E3-0600

COLLET CHUCK | REGOFIX FORM B

Model	Drawing	Technical data				Product center	Avail-ability	Order number
		Size Spann.	Ød [mm]	Steigung [mm]				
		ER 11	1-7	0,5	● ● ●	○	B134-424E-...	
		ER 16	1-10	0,5	● ● ●	○	B134-426E-...	
		ER 20	1-13	1	● ● ●	○	B134-428E-...	
		ER 25	1-16	1	● ● ●	○	B134-430E-...	
		ER 32	3-20	1	● ● ●	○	B134-470E-...	
		ER 40	4-26	1	● ● ●	○	B134-472E-...	


Order No.		
ER 16	B134-426E-	<input type="checkbox"/>
d=6	0600	

¹ Collet chuck can clamping up to 0,5 mm smaller as nominal range d

² Collet chuck can clamping up to 1 mm smaller as nominal range d

Example: B134-424E-0600

COLLET CHUCK FOR TAP | REGOFIX WITH INTERNAL SQUARE SECTION

Model	Drawing	Technical data				Product center	Avail-ability	Order number
		Size Collet	Ød [mm]	SW [mm]				
		ER 16	4-10	3,15-7	● ● ●	○	B134-E3...	
		ER 20	4-13	3,15-9	● ● ●	○	B134-E4...	
		ER 25	4-16	3,15-16	● ● ●	○	B134-E5...	
		ER 32	4-20	3,15-20	● ● ●	○	B134-E6...	
		ER 40	6-22	6-22	● ● ●	○	B134-E7...	


Order No.		
ER 16	B134-E3-	<input type="checkbox"/>
d=6	0600	
SW=4,9	49	

Example: B134-E3-060049


ACCESSORIES

WRENCHES


CLAMPING WRENCH | EXTERNAL CLAMPING NUT

Model	Drawing	Technical data		Product center	Availability	Order number
		Size	Spannzange			
		ER 11M		● ● ●	●	B136-M1
		ER 16M		● ● ●	●	B136-M3
		ER 20M		● ● ●	●	B136-M3
		ER 20		● ● ●	●	B136-E4
		ER 25		● ● ●	●	B136-E5
		ER 32		● ● ●	●	B136-E6
		ER 40		● ● ●	●	B136-E7

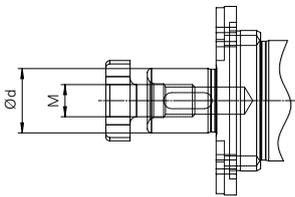
CLAMPING WRENCH | INTERNAL CLAMPING NUT

Model	Drawing	Technical data		Product center	Availability	Order number
		Size	Spannzange			
		ER 11		● ● ●	●	B136-E1AX
		ER 16		● ● ●	●	B136-E3AX
		ER 20		● ● ●	●	B136-E4AX
		ER 25		● ● ●	●	B136-E5AX
		ER 32		● ● ●	●	B136-E6AX
		ER 40		● ● ●	●	B136-E7AX

HOOK WRENCH

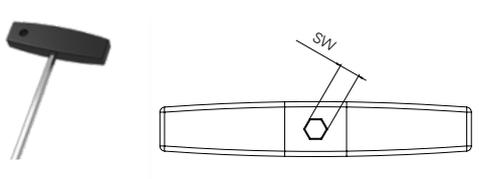
Model	Drawing	Technical data		Product center	Availability	Order number
		ØD	Spindle			
		12-14		● ● ●	●	D01810B012014
		16-18		● ● ●	●	D01810B016018
		20-22		● ● ●	●	D01810B020022
		25-28		● ● ●	●	D01810B025028
		30-32		● ● ●	●	D01810B030032
		34-36		● ● ●	●	D01810B034036
		40-42		● ● ●	●	D01810B040042
		45-50		● ● ●	●	D01810B045050
		52-55		● ● ●	●	D01810B052055
		58-62		● ● ●	●	D01810B058062
		68-75		● ● ●	●	D01810B068075
		80-90		● ● ●	●	D01810B080090
		95-100		● ● ●	●	D01810B095100

WRENCH DIN 6368 | FOR CROSS RETAINING SCREWS

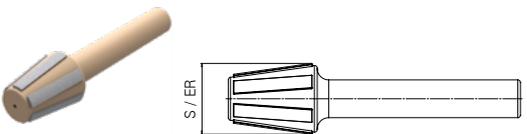
Model	Drawing	Technical data		Product center	Availability	Order number
		ØD Milling arbor	M Thread			
		16	8	● ● ●	○	D06368-080
		22	10	● ● ●	○	D06368-100
		27	12	● ● ●	○	D06368-120
		32	16	● ● ●	○	D06368-160

● PC Metal ● PC Wood ● on stock ○ on request

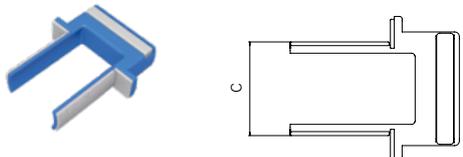
INBUS T-WRENCH | FOR BENZ SOLIDFIX® UND BENZ CAPTO™ ACTUATION

Model	Drawing	Technical data			Product center	Availability	Order number
		Size BENZ Solidfix®	Size BENZ CAPTO™	SW			
		S1		3	● ● ●	●	KL8317-45039-SW3
		S2		4	● ● ●	●	KL8317-44982-SW4
		S3		5	● ● ●	●	KL8317-45013-SW5
		S4 / S5	C3	6	● ● ●	●	KL8317-45039-SW6
			C4	8	● ● ●	●	KL8317-45039-SW8
			C5	10	● ● ●	●	KL8317-45039-SW10
	C6		12	● ● ●	●	KL8317-45112-SW12	

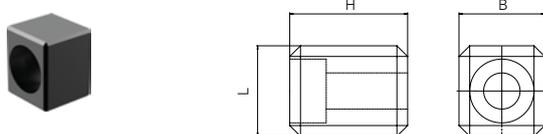
TAPER CLEANER | BENZ SOLIDFIX® / COLLET CHUCK

Model	Drawing	Technical data		Product center	Availability	Order number
		Size BENZ Solidfix®	Size Collet chuck			
		S1	ER 11	● ● ●	○	B069-ER16
		S2	ER 16	● ● ●	○	B069-ER16
		S3	ER 20	● ● ●	○	B069-ER20
		S4	ER 25	● ● ●	○	B069-ER25
		S5	ER 32	● ● ●	○	B069-ER32

TAPER CLEANER | BENZ CAPTO™

Model	Drawing	Technical data		Product center	Availability	Order number
		Size BENZ CAPTO™				
		C3		●	○	B069-C3
		C4		●	○	B069-C4
		C5		●	○	B069-C5
		C6		●	○	B069-C6
		C8		●	○	B069-C8

KEY BLOCK DIN 2097 | FOR MILLING ARBORS

Model	Drawing	Technical data				Product center	Availability	Order number
		Ød1 [mm]	L [mm]	B [mm]	H [mm]			
		16	8,5	8	11	●	●	B245-66
		22	11	10	8,6	●	●	B245-81
		27	10	12	9,3	●	●	B245-126
		32	12	14	14	●	●	B245-117

ACCESORIES

FURTHER ACCESSORIES ON REQUEST

COOLANT NOZZLE



Verschiedene Varianten

REDUCING SLEEVES

VDI



Verschiedene Sizen und Varianten

Please contact our [BENZ sales team](#).

PICTOGRAMS & ABBREVIATIONS OVERVIEW

OTHER-SPECIFICATION

System advantages



Set-up time



Investment



Easy to handle



Safe to handle

Adapter options



IC- capable



MQL-capable

Common information



Info



Video



Service



Accessories

ABBREVIATIONS

M_{max}	Maximum torque
i	Gear ratio
n_{max}	Maximum speed
P_{max}	Maximum pressure (bar)
EC	External cooling
IC	Internal cooling
p.	Page
✓	Possible
-	Not possible
SW	Width across flats
mm	Millimeter

BENZ PRODUCT WORLD

TOOLING & MACHINE TOOLING TECHNOLOGY

TOOLING TECHNOLOGY



METAL

TOOLS FOR TURNING CENTERS LIVE TOOLS / STATIC TOOLS

- Radial heads 90°
- Radial heads ≠ 90°
- Axial heads
- Swivel heads
- Multi-spindle heads
- Broaching units
- Static tools

COMPONENTS. Our comprehensive tool concepts for turning centers and milling centers are ideal for nearly every application. Providing a technological advantage is our goal.

SPECIFIC TO THE CUSTOMER. Our modular approach enables customized configurations.

SYSTEMS. We develop special customer-specific tools for OEM and end customers on request.



METAL

TOOLS FOR MACHINING CENTERS

- Angle heads 90°
- Angle heads ≠ 90°
- Swivel heads
- Multi-spindle heads
- Broaching units
- High-speed spindles
- Rotating tool holders

KNOWLEDGE AND EXPERIENCE. Our knowledge of the metalworking industry and decades of development partnership make us ideal for new tasks anywhere in the world.

COMPONENTS. We deliver a vast array of standard components from stock and develop innovative, customized systems for OEM and end customers.

VARIETY. Whether in machining centers in the automotive, aerospace or wind energy industries, units from BENZ can be used anywhere. Numerous customers choose us as their systems and innovation partner.



WOOD / COMPOSITE AND ALUMINIUM

TOOLS FOR MACHINING CENTERS

- Angle heads 90°
- Swivel heads
- Multi-spindle heads
- Multi-axis heads
- Sanding units
- Floating head units
- Rotating tool holders

FOR ANY APPLICATION. Cost-effectively process and machine wood, composites and aluminium: We provide series production angle heads for drilling, milling, sawing and grinding in addition to other units for special applications.

FROM BASIC TO HIGH-END. BENZ units are available in a variety of performance classes, making them ideal for everything from light machining to high-performance continuous operation.

SYSTEMS. We have the solution for your special applications: Customized BENZ units for machining centers. Put us to the test!

MACHINE TOOLING TECHNOLOGY



METAL

MULTI-SPINDLE HEADS AND LARGE DRILL HEADS

- Large angle heads
- Large drill heads
- XXL multi-spindle heads

DEVELOPMENT PARTNER. We accompany you from brainstorming to inspection of the final machine, always to your expectations.

Our assortment ranges from compact heads to XXL units.

SYSTEMS. BENZ stands for high-end solutions in the fields of machine tooling technology, specialty solutions, custom assemblies and mechanical modules. We manufacture and configure multiple-spindle and large-angle heads as well as large drill heads.

COMPONENTS. Attachment units complete our range.



METAL / WOOD / COMPOSITE AND ALUMINIUM

SYSTEM TECHNOLOGY

- Multiple-spindle drill heads
- Motor spindles
- Motors
- 5-axis technology
- C-axes
- Swivel axes
- Rotary distributors
- Z-axes

COMPONENTS. Our range includes standard products in an assortment of shapes and sizes.

THE PERFECT ADDITION. Our system additions provide you with even more efficiency. Perfect your existing solutions with BENZ products!

SYSTEMS. We develop the technology of tomorrow. Your individual requirements for the efficiency of your machine tools and the suitability of the tools in use provide our benchmark for new, innovative solutions.

SERVICE



METAL / WOOD / COMPOSITE AND ALUMINIUM

SERVICE

- Service evaluation and repair
- Express Service (Wood)
- Rapid Repair Kit
- Preventive maintenance
- Spare part management
- Worldwide on-site service

DO NOT LOSE A SECOND. Speed is the order of the day when unexpected breakdowns occur. Our service center ensures Immediate assistance around the world. We ensure your machine has as little downtime as possible.

SERVICE QUALITY. We guarantee top service quality reflecting our expertise as a manufacturer.

FORESIGHT. We go one step further: Preventive maintenance, customized Rapid Repair Kit and our spare part management service ensure you have the best setup to face any emergency. We look to the future to keep you at your peak.

ARE YOU ALREADY FAMILIAR WITH OUR EXPERTISE?

- TEAMS OF EXPERTS WITH INDUSTRY EXPERIENCE
- INTERNATIONALLY NETWORKED THROUGH WORLD-WIDE LOCATIONS AND PARTNERS
- THE HIGHEST QUALITY FOR ALL PRODUCTS AND SERVICES
- PRECISE, CUSTOMER-SPECIFIC SOLUTIONS
- CONSTANT DEVELOPMENT OF OUR INDUSTRY EXPERTISE

Usage note – general

The contents of this catalog are not legally binding and are intended solely for informational purposes. Any final agreement will be in the form of a written order confirmation from BENZ GmbH Werkzeugsysteme, which occurs only subject to the respective current General Terms and Conditions of Sale and Delivery of BENZ GmbH Werkzeugsysteme. These can be found online at www.benztooling.com

All of the products listed in this catalog are designed for their intended use, e.g. machines for precision machining. The recognized technical regulations for safety and professional work must be followed for use and installation.

Furthermore, the respective laws, guidelines from TÜV, guidelines from the respective trade association and VDE stipulations shall apply.

The technical data listed in this catalog must be observed by the user. The conditions of use may not fall below or exceed the specified data. If information is missing, it cannot be assumed that there are no upper or lower limits or no limitations for specific use cases. Consultation is required in these cases.

Disposal is not included in the price, which would have to be taken into account accordingly in the event of return to or disposal by BENZ GmbH Werkzeugsysteme.

TECHNICAL DATA AND FIGURES

The technical data and figures have been compiled with great care and to the best of our knowledge. We cannot guarantee that the information is up to date, correct or complete.

The specifications and information - such as figures, drawings, descriptions, dimensions, weights, materials, technical and other performance data and the described products and services - contained in general product descriptions, BENZ GmbH Werkzeugsysteme catalogs, brochures and price lists in any form are subject to change and may be modified or updated at any time without prior notification. They are binding only to the extent expressly specified in a contract or order confirmation. Slight deviations from such descriptive product information shall be considered approved and shall not affect fulfillment of agreements insofar as they are reasonable for the customer.

LIABILITY

Products from BENZ GmbH Werkzeugsysteme are subject to the German Product Liability Act. This catalog does not contain any guarantees, assurances of quality or procurement agreements for the products it depicts, neither expressly nor implied, including for the availability of products. Advertising statements relating to quality features, properties or applications for the products are not legally binding.

To the extent permitted by law, BENZ GmbH Werkzeugsysteme is exempt from any liability for direct or indirect damage, subsequent damage and requests of any kind or on any legal basis resulting from the use of information contained in this catalog.

TRADEMARK, COPYRIGHT AND REPRODUCTION

The depiction of commercial property rights in this catalog - such as brands, logos, registered trademarks or patents - does not include the granting of licenses or use rights. Their use is not permitted without the expressed written agreement of BENZ GmbH Werkzeugsysteme. All contents of this catalog are the intellectual property of BENZ GmbH Werkzeugsysteme. For the purposes of copyright, any unlawful use of intellectual property, including excerpts, is prohibited. Reprinting, copying or translating (including in the form of excerpts) are permitted only with the prior written consent of BENZ GmbH Werkzeugsysteme.

STANDARDS

BENZ GmbH Werkzeugsysteme has a quality management system certified in accordance with ISO 9001:2008. BENZ GmbH Werkzeugsysteme has an environmental management system certified in accordance with ISO 14001:2004.

Usage note – individual

DECLARATION OF INCORPORATION IN TERMS OF THE EC DIRECTIVE 2006/42/EC ON MACHINERY (ANNEX II 1 B)

We hereby declare that our products meet the basic requirements of the Machinery Directive 2006/42/EC as an incomplete machine to the extent that this is possible as part of delivery.

We also declare that the specific technical documents were produced in accordance with Annex VII Part B of this Directive. We undertake to provide the market supervisory bodies with versions of the incomplete machine's special documents via our documentation department should they have reason to request them.

The incomplete machine also satisfies the stipulations of EC Directive 2014/30/EU on electromagnetic compatibility. The protective goals of EC Directive 2014/35/EU regarding electronic equipment have been met.

The incomplete machine may only be commissioned if it has been ascertained, if applicable, that the machine or system in which the incomplete machine is to be installed satisfies the requirements of Directive 2006/42/EC on Machinery and an EC declaration of conformity has been drawn up in accordance with Annex II.

This catalogue was issued with great care and all specifications were checked for correctness. However, no liability is assumed for incorrect or incomplete information. BENZ GmbH Werkzeugsysteme reserves the right to make technical changes and improvements through continual further development of the products and services. All texts, images, representations and drawings in this catalogue are the property of BENZ GmbH

Werkzeugsysteme and are protected by copyright. Any kind of reproduction, editing, modification, translation, filming or processing and saving in electronic systems is prohibited without the consent of BENZ GmbH Werkzeugsysteme.

The contents and data are valid at the time of printing. Edition 12/2023

BENZ GmbH Werkzeugsysteme

Im Mühlegrün 12
D-77716 Haslach
T +49 7832 704-0
F +49 7832 704-8001
info@benztooling.com
www.benztooling.com

