



SLOTWORX® HP

Size S

Excellent for use on small HSC machines and machining centers.

- due to high number of flutes very high feedrates are possible
- offers a real corner radius for close contour work

Milling cutter bodies	Catalogue no.	d_1	l	r	l_3	l_2	l_1	d_2	d_3	z	Accessories	Features
DuoPlug®	3 12 266 SG	12	6.2	2	28	0.7	-	M 7	10.8	3	A, B, C, D, E, F	
	4 16 266 SG	16	6.2	2	31	0.7	-	M 10	15	4	A, B, C, D, E, F	
	5 20 266 SG	20	6.2	2	33	0.7	-	M 12	18.6	5	A, B, C, D, E, F	
Screw-on type	2 10 266 M6	10	6.2	2	22,5	0.7	-	M 6	9.75	2	A, B, C, D, E, F	
	3 12 266 M6	12	6.2	2	22,5	0.7	-	M 6	11.5	3	A, B, C, D, E, F	
	4 16 266	16	6.2	2	27,5	0.7	-	M 8	13.8	4	A, B, C, D, E, F	
	5 20 266	20	6.2	2	27,5	0.7	-	M 10	18	5	A, B, C, D, E, F	
	5 25 266	25	6.2	2	32	0.7	-	M 12	18	5	A, B, C, D, E, F	

Milling cutter bodies	Catalogue no.	d ₁	l	r	l ₃	l ₂	l ₁	d ₂	d ₃	z	Accessories	Features
-----------------------	---------------	----------------	---	---	----------------	----------------	----------------	----------------	----------------	---	-------------	----------

Plain shank	2 30 10 166 G	10	6.2	2	30	0.7	70	10	-	2	A, B, C, D, E, F	
	3 36 12 166 G	12	6.2	2	36	0.7	81	12	-	3	A, B, C, D, E, F	
	4 48 16 166 G	16	6.2	2	48	0.7	96	16	-	4	A, B, C, D, E, F	

Accessories	POKOLM 06 500 P Torx screw A > Page 6	TV 04-1 Torque Vario® - S Screwdriver with scale, C > Page 6	TV 500 Torque Vario® - SETTER Setting tool D > Page 6	T6 500 P Torx interchangeable bit for Torque Vario® E > Page 6	T6 502 P Torx magic spring bit for Torque Vario® F > Page 6

Inserts	Catalogue no.	ISO Standard	Carbide grade	Coating	l	s	r	M
	02 66 835 R20	XCHW 062220 EN	HSC 05	PVTi	6.2	2.2	2	M 2
	02 66 835 R20 D	XCHW 062220 EN	HSC 05	PVDiaN	6.2	2.2	2	M 2
	02 66 836 R20	XCHW 062220 EN	HSC 05	PVTiH	6.2	2.2	2	M 2

feed per tooth (f_z) | d.o.c. (a_p)

Material	Carbide grade Coating	feed per tooth d.o.c.	Steel	Stainless steel	Cast iron	Non ferrous materials	High temperature alloys	Hardened steel
	HSC 05 PVTi	f_z (mm) a_p (mm)	0.05-0.7 0.05-0.4	-	0.05-0.7 0.05-0.4	-	-	0.05-0.6 0.05-0.4
	HSC 05 PVDiaN	f_z (mm) a_p (mm)	-	-	-	0.05-0.7 0.05-1	-	-
	HSC 05 PVTiH	f_z (mm) a_p (mm)	0.05-0.7 0.05-0.4	-	0.05-0.7 0.05-0.4	-	-	0.05-0.6 0.05-0.4

Cutting speed Vc in m/min

Material	Steel	Stainless steel	Cast iron	Non ferrous materials	High temperature alloys	Hardened steel	
Carbide grade Coating	Application						
HSC 05 PVTi	Roughing Finishing	120 210 300 150 225 300	-	100 200 300 200 275 350	-	-	35 93 150 35 93 150
HSC 05 PVDiaN	Roughing Finishing	-	-	-	200 500 800 200 500 800	-	-
HSC 05 PVTiH	Roughing Finishing	120 210 300 150 225 300	-	100 200 300 200 275 350	-	-	35 93 150 35 93 150

Major application Minor application

Roughing

Pre-finishing

Finishing

Technical data

Plunging		Ramping		Helix			
Cutter diam. d1 (mm)	X _{max} mm	Cutter diam. d1 (mm)	α°	y mm	Cutter diam. d1 (mm)	D _{min} mm	D _{max} mm
10-25	0.7	10	<2.5	4	10	13	20
		12	<2	6	12	17	24
		16	<1.6	10	16	25	32
		20	<1.2	14	20	33	39
		25	<1	19	25	43	49

SLOTWORX® HP – Accessories

Accessories	Catalogue no.	Description	Dimensions		
	21 500 P	Torx screw M 2.0	M 2.0	L 4	T 6 IP
	06 500 P	Torx screwdriver (Torx-Plus)	T 6 IP		
	TV 04-1	Torque Vario® S Torx Screwdriver with scale	from 0.4 Nm	up to 1.0 Nm	with scale
	TV 500	Torque Vario® Setter setting tool			
	T6 500 P	Torx interchangable bit for Torque Vario®	T 6 IP	L 175	max. 0.6 Nm
	T6 502 P	Torx magic spring bit for Torque Vario®	T 6 IP	L 175	max. 0.6 Nm

Starting torque for Torxscrews: M_d 0,43 Nm

FROM PRACTICE TO PRACTICE

JOB DESCRIPTION:

Stock material machining of a plastic injection mould and preparing for finishing with a constant depth of cut of 0.2 mm. The dimension created by the predecessor tool before hardening amounted to 3 mm.

Especially on inner radii and narrow grooves, the proportion of full cuts is a critical point.

This can lead to significantly increased wear on indexable inserts.

Major requirement/archivement: secure machining of the complete part without machine down time.

MACHINE	MATERIAL	PROGRAMMING SYSTEM
Millstar LMV 1200	1.2344 52 HRC	Heidenhain iTNC 530

APPLICATION PARAMETERS:


component:	Injection moulding tool
material:	1.2344 52 HRC
arbor:	75 08 754
cutter body:	SLOTWORX® HP
	4 16 266
insert:	02 66 835 R20
coating:	PVTi
V_c (speed):	140 m/min
V_f (feed rate):	5,000 mm/min
S (revolutions):	2,700 1/min
d₁ (nominal diameter) :	16 mm
f_z (feed per tooth):	0.46 mm
a_p (depth of cut):	0.3 mm
a_e (width of cut):	up to 16 mm
tool life:	> 110 min
life length:	> 550 m



RESULT:

Outstanding smooth running, high surface quality and hardly any noticeable wear on the indexable insert in conjunction with the highest contour accuracy, ensured perfect preparation of the mould for the following finishing process.

SLOTWORX® HP has proven to be the ideal solution for this task. The extremely low insert wear also increases the cost efficiency of this milling system.

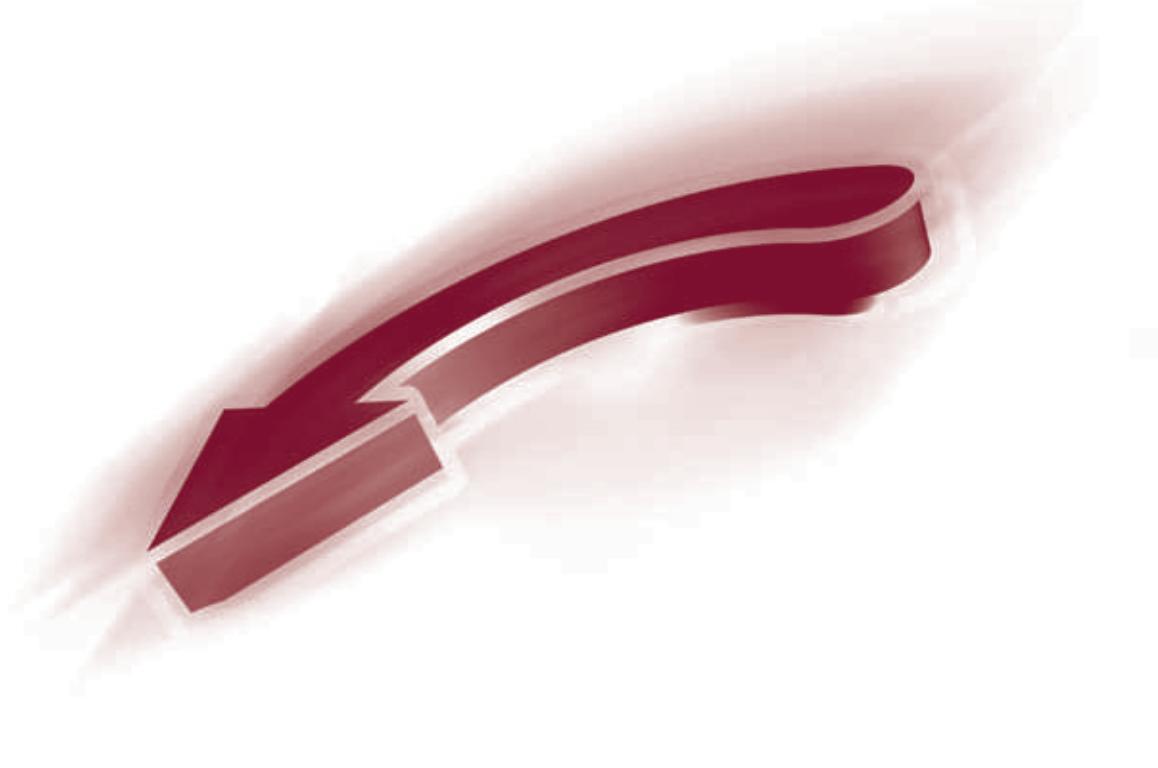

**Pokolm
Frästechnik GmbH & Co. KG**

Adam-Opel-Straße 5
33428 Harsewinkel
Germany

Fon: +49 5247 9361-0

Fax: +49 5247 9361-99

info@pokolm.com

www.pokolm.com



www.pokolm.com